



Dimensions in: mm/inch


Series 34

**LED navigation lights –
The latest LED generation in
an attractive and slim design.
Totally maintenance-free**

Application

Application depending on required visibilities. See product table

Housing

Aluminium/Polycarbonate, seawater resistant, UV protected, non-corrosive, non-magnetic, impact and shock resistant

Optics

Innovative lens technology for wide visibility with two light-emitting diodes

Mounting

Deck-mount

Electric

Invers polarity protection included, bulb included



1 Bicolor aluminium



2 Bicolor white



3 Bicolor black

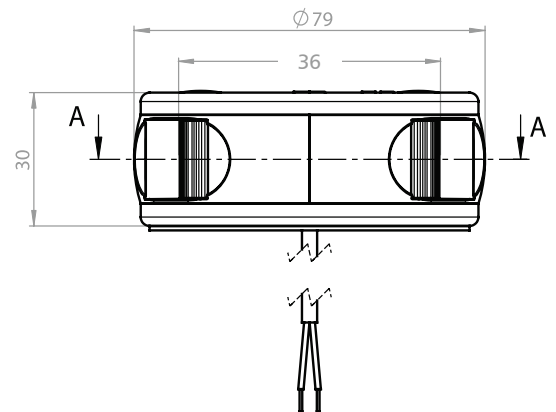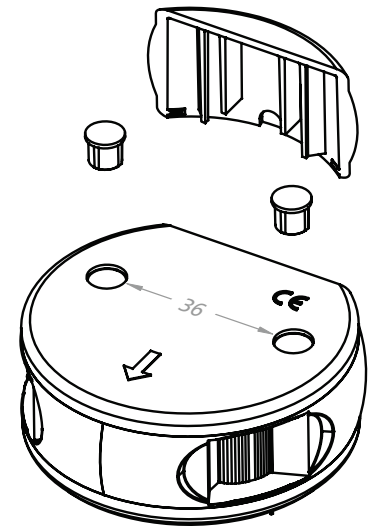

Deck-mount or under step!

NEW!

No.	Description	Ship size	Wattage	Visibility	Housing colour	Mounting	Voltage	Article number
1	Bicolor	< 20 m/ < 65 ft.	3 W	2 nm	Aluminium	deck-mount	12 V, 24 V	3863201000
2	Bicolor	< 20 m/ < 65 ft.	3 W	2 nm	White	deck-mount	12 V, 24 V	3863101000
3	Bicolor	< 20 m/ < 65 ft.	3 W	2 nm	Black	deck-mount	12 V, 24 V	3863001000